

CLASSIC COMPOSITE CLADDING

A solid, robust structure – our Classic range is designed to withstand the rigours of the British weather, giving a dependable performance in all seasons.

Engineered to weather to a natural textured finish, the Classic range offers the best of both worlds, the look of timber with the durability of composite.





WHY CHOOSE NEOTIMBER CLASSIC CLADDING?

LOW MAINTENANCE

Cleaning and scrubbing are a thing of the past thanks to the design of our cladding boards. A melded fusion of wood and plastic polymers, the Classic range resists moisture making it more difficult for dirt and algae to adhere.

LONG-LIFE SOLUTION

Made from a composite which combines the strength of wood with the elasticity of plastic, painting, stripping and varnishing is yesterday's problem with Classic composite cladding. Supplied with a 25-year residential and 10-year commercial manufacturer's warranty you can install with peace of mind.





FIRE-RATED CLADDING

We understand that a focus on safety is a paramount importance. Our Classic cladding has been fully fire tested and is rated as Class C, this means that it is suitable for use in low-rise residential and commercial developments.



TECHNICAL SPECIFICATIONS

BOARD DIMENSIONS 139mm (W) x 20mm (D) x 3600mm (L)

WEIGHT PER BOARD 5.65kg

LOW MAINTENANCE ★★★☆☆

DURABILITY ★★★★☆


FADE RESISTANCE ★★★☆☆

STAIN RESISTANCE ★★☆☆☆



PERFORMANCE DATA

Characteristics	Method	Result
Density	ASTM D792-13, Method A	1.35g/cm3
Flexural Strength	ASTM D7032-17	29.1 Mpa
Flexural Stiffness	ASTM D7032-17	3543 Mpa
Impact Resistance	ASTM D4812-19	56 J/m
Durometer Hardness	ASTM D2240-15ε1	69.4 Shore D
Tensile Strength	ISO 527-2:2012	24.5 Mpa
Water Absorption	ASTM D570-98:R2018	0.65%
Linear Thermal Expansion	EN 15534-1:2014+A1:2017	43.2x10-6 K-1
Reaction to Fire	EN 13501-1	C-s1 d0

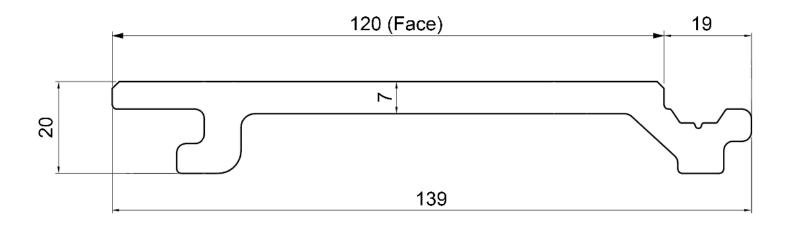



GREY. CHARCOAL. TEAK. CHOCOLATE. THE CLASSIC COLOURS.



SUPPLEMENTARY ACCESSORIES



Need help? Call us on 01509 323 170 or email enquiries@neotimber.com