

SLATTED COMPOSITE CLADDING

The beauty of Slatted composite cladding is in its simplicity. Here at NeoTimber® we've taken the hard work out of installation.

No need to attach an extra back board on which to individually attach your slats, our cladding boards come with four slats per panel, complete with integral backing.



WHY CHOOSE NEOTIMBER SLATTED CLADDING?




SLEEK SOPHISTICATION

Slatted cladding has gorgeous crisp, sleek lines and is available in eight stunning colours. Choose grey or silver birch for a modern look, oak or chocolate for traditional, antique for timeless elegance, ash white or teak for a sophisticated feel, or charcoal, for that striking charred timber effect.

LONG LIFE

NeoTimber® Slatted cladding is designed to go the distance. Supplied with a 25-year residential and 10-year commercial manufacturer's warranty, it outstrips timber by a country mile. It never needs staining or treating, just a regular wash down and it's good as new, every time.

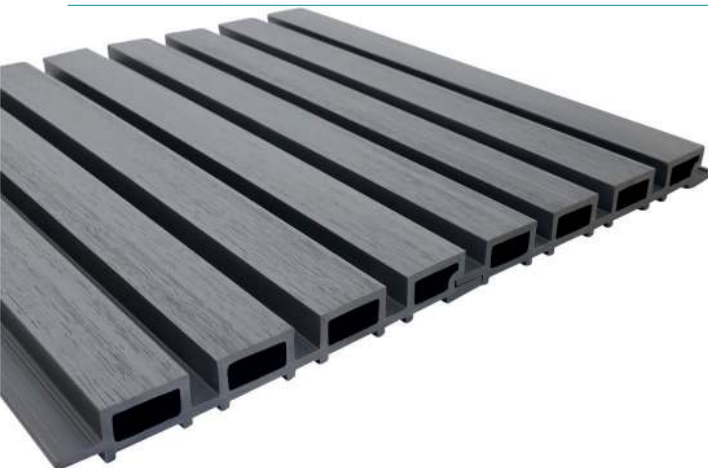

CLASS D FIRE RATING

We recognise that safety is of critical importance when specifying for a building project. Our Slatted composite cladding boards are Class D fire-rated, that means they are suitable for use on low-rise residential and commercial developments (under 11m in height).

TECHNICAL SPECIFICATIONS

BOARD DIMENSIONS

219mm (W) x 26mm (D) x 3600mm (L)

WEIGHT PER BOARD

10.26kg

LOW MAINTENANCE

★★★★★

DURABILITY

★★★★★

FADE RESISTANCE

★★★★★


STAIN RESISTANCE

★★★★★



PERFORMANCE DATA

Characteristics	Method	Result
Density	ASTM D792-13, Method A	1.27g/cm ³
Flexural Strength	ASTM D7032-17	26.9 Mpa
Flexural Stiffness	ASTM D7032-17	3813 Mpa
Impact Resistance	ASTM D4812-19	66 J/m
Durometer Hardness	ASTM D2240-15ε1	67.8 Shore D
Tensile Strength	ISO 527-2:2012	23.0 Mpa
Water Absorption	ASTM D570-98:R2018	0.13%
Linear Thermal Expansion	EN 15534-1:2014+A1:2017	37.8x10 ⁻⁶ K ⁻¹
Reaction to Fire	EN 13501-1	D-s1 d0

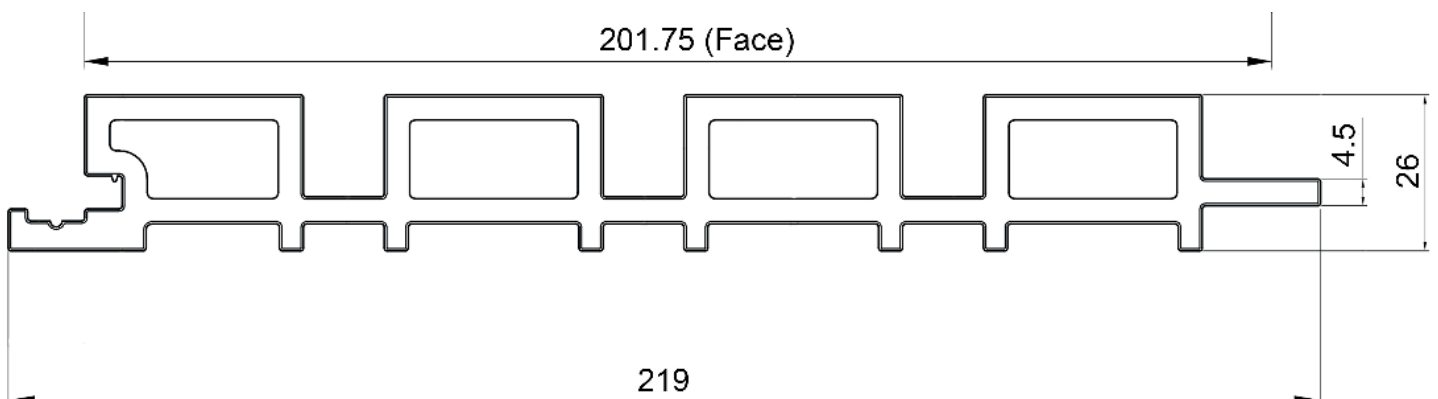

EIGHT SLATTED COLOURS. ANTIQUE. ASH WHITE. CHARCOAL. CHOCOLATE. GREY. OAK. SILVER BIRCH. TEAK.



Antique



Ash White



Charcoal



Chocolate



Grey



Oak



Silver Birch



Teak

SUPPLEMENTARY ACCESSORIES



Composite Joists

Dimensions: 59mm x 40mm x 3600mm



Deluxe & Slatted Skirting Trim

Dimensions: 70mm x 10mm x 3600mm



Deluxe & Slatted Corner Trim

Dimensions: 45mm x 45mm x 3600mm



Starter Clip Set

100 units per box



Cladding Screws

Dimensions: 4mm x 35mm

100 units per box



Coloured Trim Screws

Dimensions: 4mm x 35mm

100 units per box

Need help?

Call us on 01509 323 170

or email enquiries@neotimber.com