

DELUXE COMPOSITE CLADDING

Capped for extra water-resistance, our Deluxe cladding board is wrapped in a plastic polymer shell which shields the composite core from water damage and erosion.

Available in eight colours and two distinct finishes (Woodgrain or Brushed), the Deluxe range offers the perfect choice—whether you prefer the timeless charm of traditional timber or a sleek, modern aesthetic.



WHY CHOOSE NEOTIMBER DELUXE CLADDING?



FADE AND STAIN RESISTANT

The Deluxe cladding board has UV inhibitors which prevent fading so cladding boards retain their bright tone throughout the lifespan. The capped composite Deluxe board is 100% waterproof meaning that spills and rainwater cannot seep into the cladding, unlike timber, and therefore will not stain.

WOODGRAIN AND BRUSHED FINISHES

Our Deluxe cladding range comes in eight on-trend colours and two unique texture finishes. Choose the deep-embossed Woodgrain finish for a natural, warm, and rustic feel, or opt for the sleek Brushed finish to achieve a modern, minimalist look.



CLASS D FIRE RATED

We recognise that safety is of critical importance when specifying for a building project. Our Deluxe composite cladding boards are Class D fire-rated, that means they are suitable for use on low-rise residential and commercial developments (under 11m in height).

TECHNICAL SPECIFICATIONS

BOARD DIMENSIONS

174mm (W) x 21mm (D) x 3600mm (L)

WEIGHT PER BOARD

7.88kg

LOW MAINTENANCE

★★★★★

DURABILITY

★★★★★

FADE RESISTANCE

★★★★★


STAIN RESISTANCE

★★★★★



PERFORMANCE DATA

Characteristics	Method	Result
Density	ASTM D792-13, Method A	1.27g/cm ³
Flexural Strength	ASTM D7032-17	26.9 Mpa
Flexural Stiffness	ASTM D7032-17	3813 Mpa
Impact Resistance	ASTM D4812-19	66 J/m
Durometer Hardness	ASTM D2240-15ε1	67.8 Shore D
Tensile Strength	ISO 527-2:2012	23.0 Mpa
Water Absorption	ASTM D570-98:R2018	0.13%
Linear Thermal Expansion	EN 15534-1:2014+A1:2017	37.8x10 ⁻⁶ K ⁻¹
Reaction to Fire	EN 13501-1	D-s1 d0

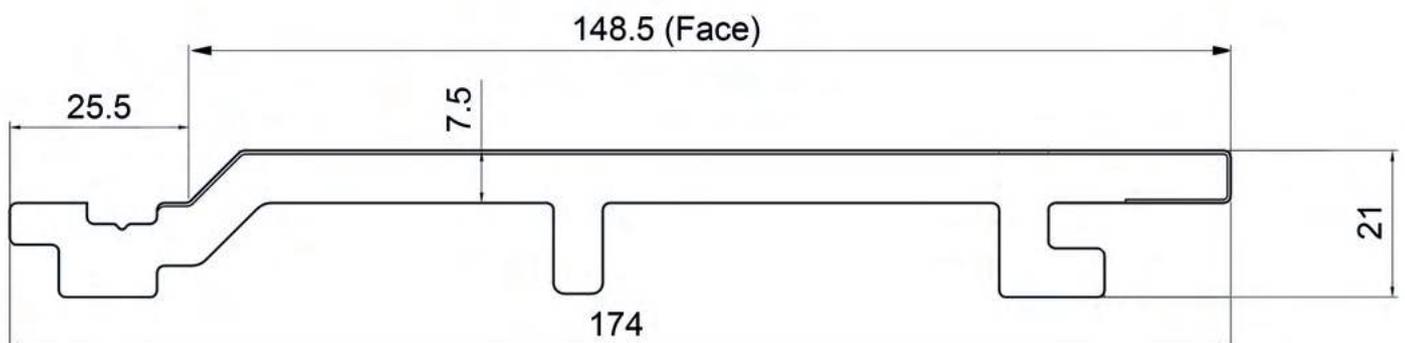

EIGHT DELUXE COLOURS. ANTIQUÉ. ASH WHITE. CHARCOAL. CHOCOLATE. GREY. OAK. SILVER BIRCH. TEAK.



Antique



Ash White



Charcoal



Chocolate



Grey



Oak



Silver Birch



Teak


SUPPLEMENTARY ACCESSORIES

See the full range of cladding accessories at neotimber.com



Composite Joists

Dimensions: 59mm x 40mm x 3600mm

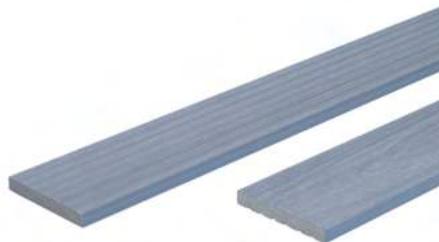

Deluxe & Slatted Skirting Trim

Dimensions: 70mm x 10mm x 3600mm



Deluxe & Slatted Corner Trim

Dimensions: 45mm x 45mm x 3600mm



Starter Clip Set

100 units per box



Cladding Screws

Dimensions: 4mm x 35mm

100 units per box



Coloured Trim Screws

Dimensions: 4mm x 35mm

100 units per box

Need help?

Call us on 01509 323 170

or email enquiries@neotimber.com